



BOOT WASHERS

Unitech bootwash systems are the solution for customers every requirement where hygiene is paramount. Ranging from individual manual bootwashers to 'corridor fixed' automatic systems. These systems have a worldwide reputation for reliability, ease of maintenance and cleaning. Unitech can integrate boot washers with hand wash, sanitising turnstiles and barrier railing to provide a complete cleansing system area.

Tel: +44(0)1543 675800 Fax: +44(0)1543 687070 email: info@unitech.uk.com web: www.unitech.uk.com



BOOT WASHERS



CONTINUOUS PASSAGE TWO-WAY BOOT WASHER WITH 6 TURNING SOLE BRUSHES. REF USC 01327A


- Photoelectric switch at each end.
- Created for continuous passage, the machine can be installed in a place which makes its use obligatory.
- The boot and the sole cleaning is done by the combined action of:
 - The turning lateral brushes for cleaning the side of the boot.
 - The turning horizontal brushes for the sole.
 - Water-jets.
 - The forward movement of the user.
- Dismantling without tool for easy cleaning of the brushes and the sump.
- Separate wet and electrical compartments.
- Supplied with detergent injector for the disinfection product.



TECHNICAL SPECIFICATIONS

- 304 stainless steel construction.
- Matt finish.
- 4 inclined brushes for cleaning the body of the boot.
- 2 horizontal brushes for cleaning the sole of the boot or clog.
- Detergent injector - regulation : between 1 and 7.5%.
- Base size: 2850 x 950mm.
- Removable steps.
- **Water supply:**
 - Advised pressure : 3 bars.
 - Maximum temperature : 50°C
 - Water flow rate : 25l/min
- **Electric supply**
 - 3 x 415V with earth-power : 2,3kw - 50Hz
 - Connection to electrical box.

DIMENSIONS

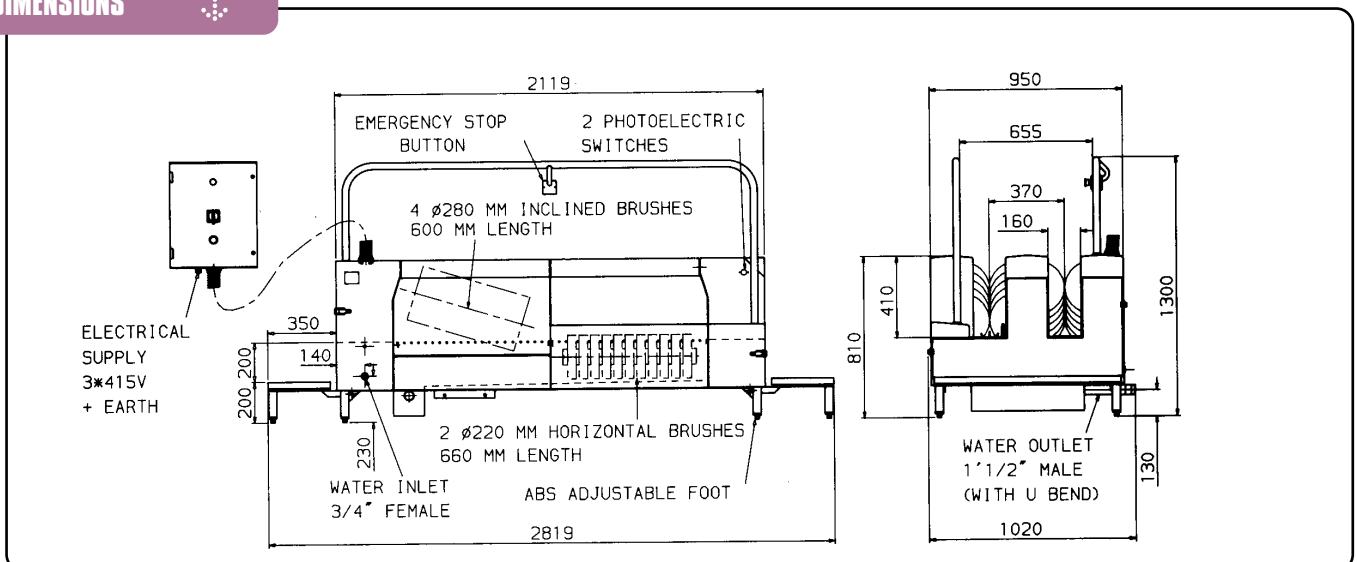

BOOT WASHERS



CONTINUOUS PASSAGE TWO-WAY BOOT/SOLE WASHER WITH 6 TURNING SOLE BRUSHES. REF USC 01592


- Photoelectric switch at each end.
- This machine combines two different ways for cleaning of boots and clogs.
- Created for continuous passage, the machine can be installed in a place which makes its use obligatory.
- The boot and the sole cleaning is done by the combined action of:
 - The turning lateral brushes for cleaning the side of the boot.
 - The turning horizontal brushes for the sole.
 - Water-jets.
 - The forward movement of the user.
- Dismantling without tools for easy cleaning of the brushes and the sump.
- Separate wet and electrical compartments.
- Supplied with detergent injector for the disinfection product.



TECHNICAL SPECIFICATIONS

- 304 stainless steel construction.
- Matt finish.
- 4 inclined brushes for cleaning the body of the boot.
- 2 horizontal brushes for cleaning the sole of the boot or clog.
- Detergent injector - regulation : between 1 and 7.5%.
- Base size : 3280 x 1200mm.
- Removable steps.
- **Water supply:**
 - Advised pressure : 3 bars.
 - Maximum temperature : 50°C
 - Water flow rate : 25l/min
- **Electric supply**
 - 3 x 415V with earth-power : 2,3kw - 50Hz
 - Connection to electrical box.

DIMENSIONS

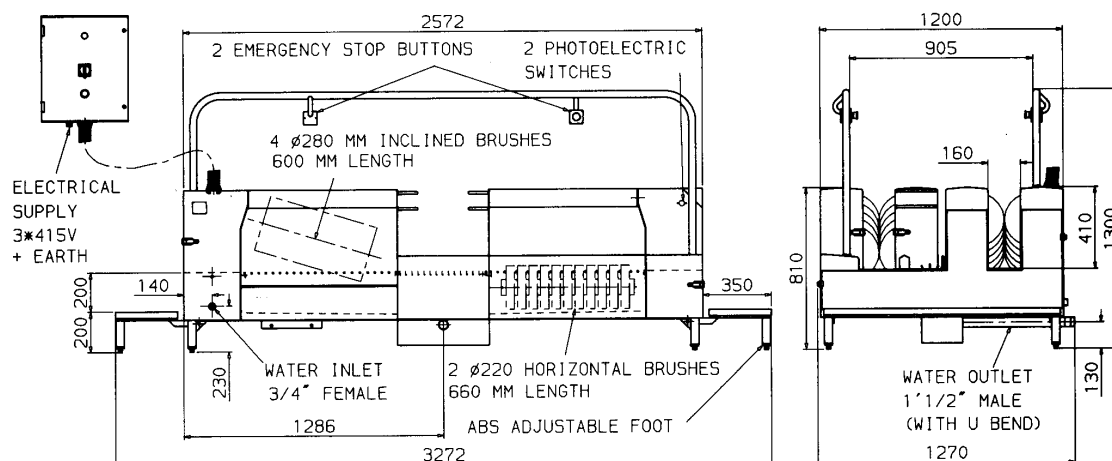

BOOT WASHERS



MECHANICAL BOOT WASHER 3 BRUSHES. REF USC 00960A


- The boot cleaning (side and sole) is done by the action of turning lateral and horizontal brushes and by the mixing of water and detergent.
- Access and easy cleaning of the machine by a complete opening of the front.
- Separate wet and electrical compartments.
- Dismantling without tools for easy cleaning of the brushes and the sump.
- Supplied with detergent injector for the disinfection product.



TECHNICAL SPECIFICATIONS

- 304 stainless steel construction.
- Matt finish.
- 2 vertical brushes for cleaning the body of the boot.
- 1 horizontal brushes for cleaning the sole.
- Detergent injector - regulation : between 1 and 7.5%.
- Base size : 760 x 645mm.
- **Water supply:**
Advised pressure : 3 bars.
Maximum temperature : 50°C
Water flow rate : 5l/min
- **Electric supply**
3 x 415V with earth-power : 0,55kw - 50Hz
Connection to electrical box.

DIMENSIONS

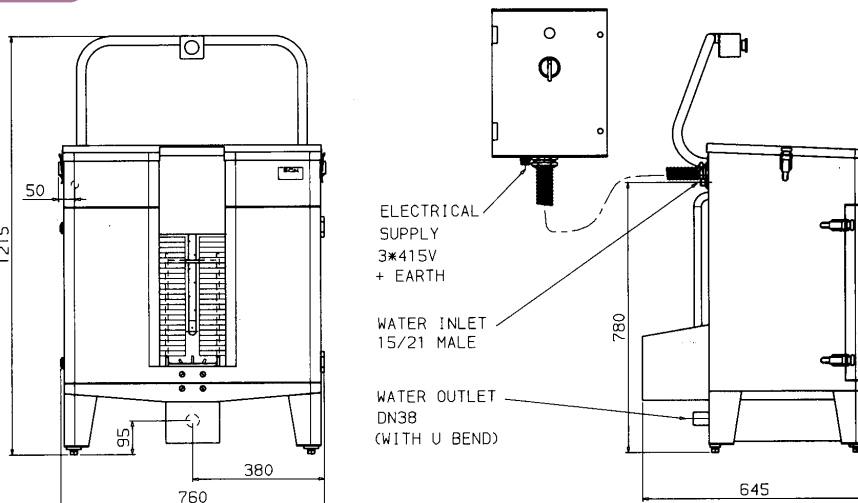

BOOT WASHERS



MECHANICAL BOOT AND SOLE WASHER 3 BRUSHES. REF USC 01659A


- For boot cleaning (side and sole) or the clog (sole and bottom).
- 2 separate functions on the same machine.
- Access and easy cleaning of the machine by a complete opening of the front.
- Dismantling without tools for easy cleaning of the brushes and the sump.
- Separate wet and electrical compartments.
- Supplied with detergent injector for the disinfection product.



TECHNICAL SPECIFICATIONS

- 304 stainless steel construction.
- Matt finish.
- 2 vertical brushes for cleaning the body of the boot.
- 1 horizontal brushes for cleaning the sole of the boot or clog.
- Detergent injector - regulation : between 1 and 7.5%.
- Base size : 760 x 880mm.
- **Water supply:**
Advised pressure : 3 bars.
Maximum temperature : 50°C
Water flow rate : 5l/min
- **Electric supply**
3 x 415V with earth-power : 0,55kw - 50Hz
Connection to electrical box.

DIMENSIONS

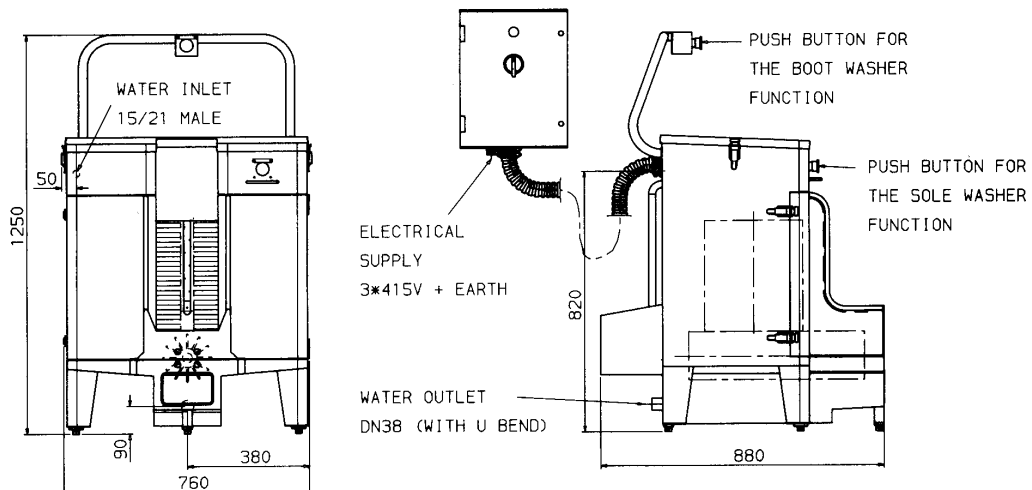

BOOT WASHERS

CONTINUOUS PASSAGE TWO-WAY BOOT WASHER WITH 2 TURNING SOLE BRUSHES. REF: USC 02104A


- Photoelectric switch at each end.
- Created for continuous passage, the machine can be installed in a place which makes its use obligatory.
- The boot cleaning is done by the combined action of:
 - Lateral brushes for cleaning the side of the boot
 - The turning horizontal brushes for the sole
 - Water-jets
 - The forward movement of the user.
- Dismantling without tool for easy cleaning of the brushes and the sump.
- Separate wet and electrical compartments.
- Supplied with detergent injector for the disinfection product.



TECHNICAL SPECIFICATIONS

- 304 stainless steel construction.
 - Matt finish.
 - 8 lateral brushes for cleaning the body of the boot.
 - 2 horizontal brushes for cleaning the sole.
 - Detergent injector - regulation : between 1 and 7.5%.
 - Base size : 2540 x 900mm.
 - Removable steps
- Water supply:**
- Advised pressure : 3 bars.
 - Maximum temperature : 50°C
 - Water flow rate : 20l/min
- Electric supply**
- 3 x 415V with earth-power : 0,80kw - 50Hz
 - Connection to electrical box

DIMENSIONS

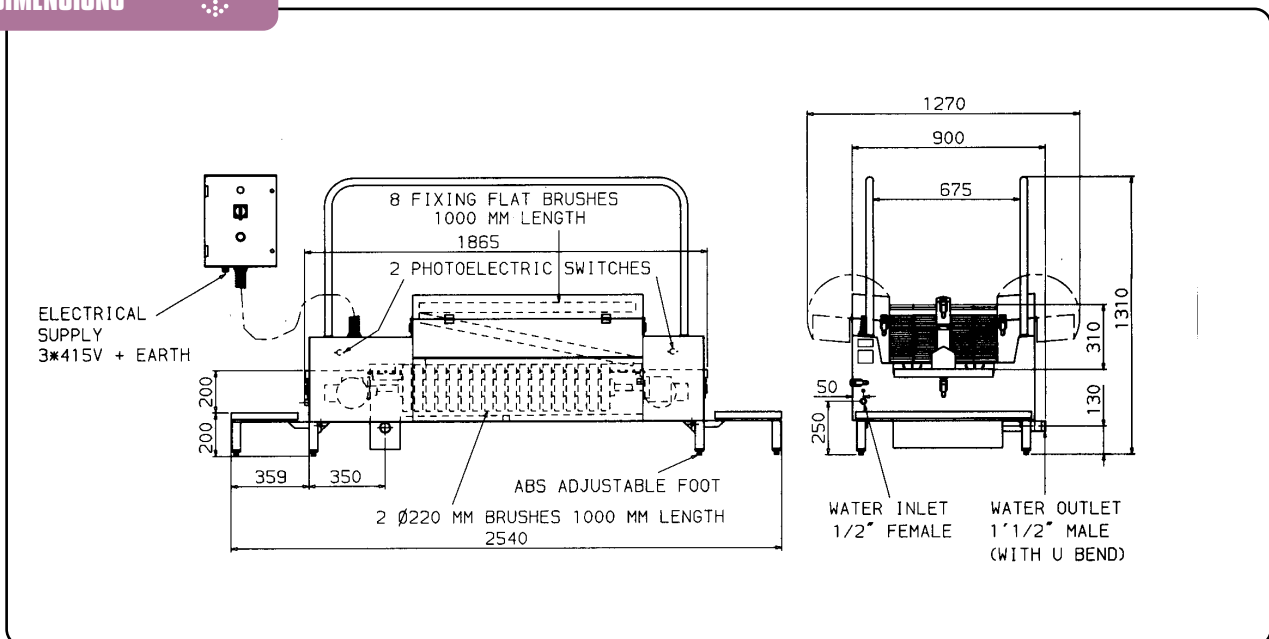

BOOT WASHERS

CONTINUOUS PASSAGE TWO-WAY SOLE WASHER. REF USC 01245A


- Photoelectric switch at each end.
- Created for continuous passage, the machine can be installed in a place which makes its use obligatory.
- The sole cleaning is done by the action of 2 horizontal turning brushes and the mixing of water and detergent.
- Separate wet and electrical compartments.
- Dismantling without tools for easy cleaning of the brushes and the sump.
- Supplied with detergent injector for the disinfection product.



TECHNICAL SPECIFICATIONS

- 304 stainless steel construction.
- Matt finish.
- 2 horizontal brushes for cleaning the sole.
Detergent injector - regulation : between 1 and 7.5%.
- Base area : 2540 x 840mm.
- Water supply:
Advised pressure : 3 bars.
Maximum temperature : 50°C
Water flow rate : 20 - 25l/min
- Electric supply
3 x 415V with earth-power : 0,80kw - 50Hz
Connection to electrical box.

DIMENSIONS

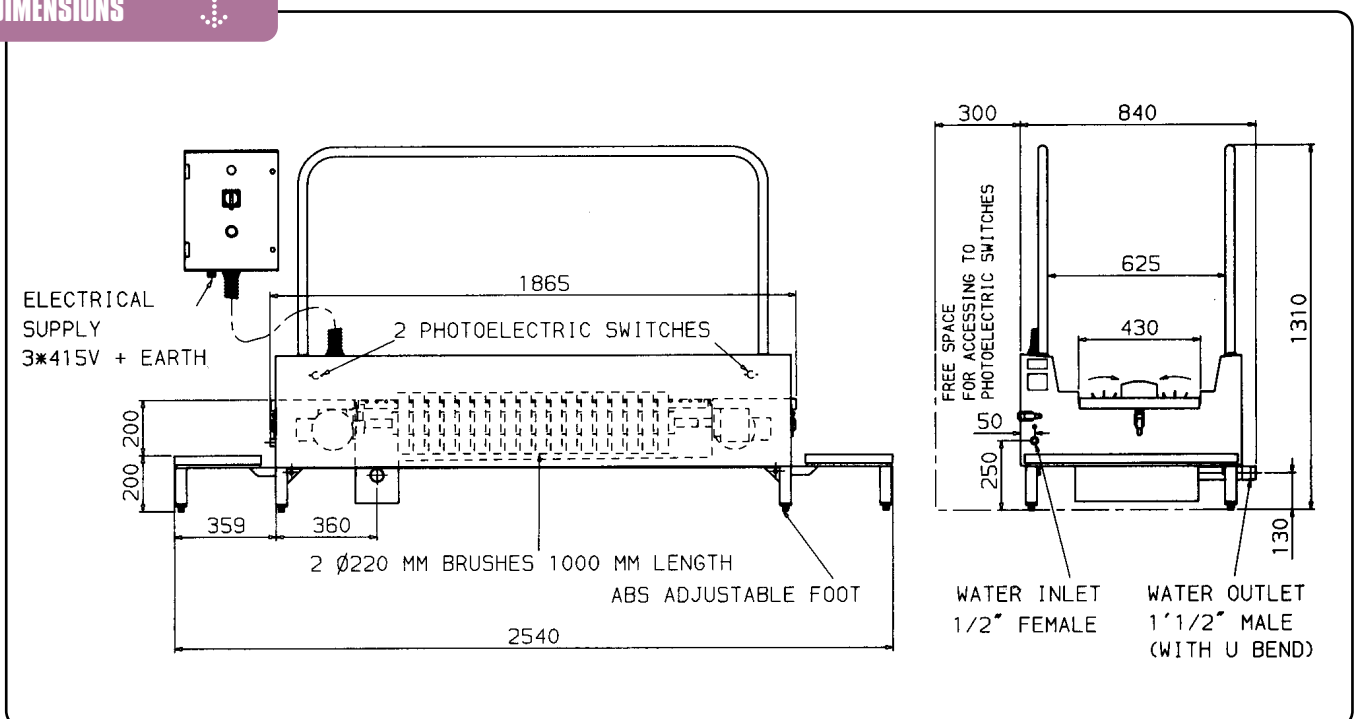


BOOT WASHERS

MANUAL BOOT WASH

- 304 grade stainless steel
- Manual operated bootwash complete with hand-held scrubbing brush.
- Hand-operated, press button, operation.
- Sole brush available as optional extra.
- Four adjustable feet.
- Support handle to left or right (please specify when ordering).

DIMENSIONS

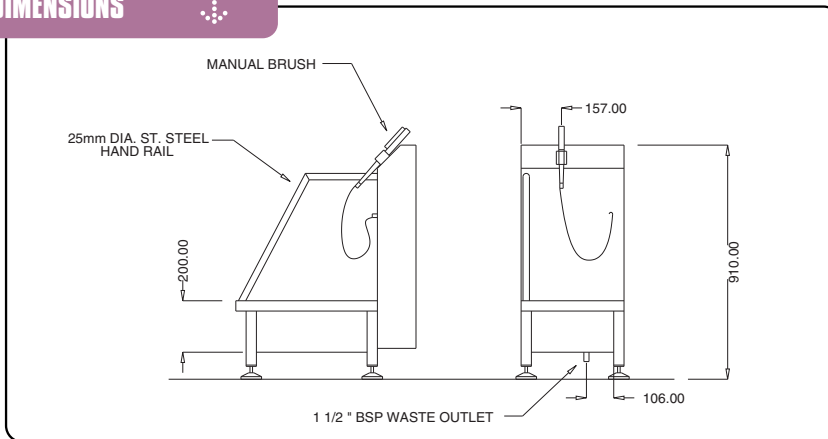


1 man	BW.M00.01
2 man	BW.M00.02
3 man	BW.M00.03
4 man	BW.M00.04

CLOG WASHERS

MECHANICAL SOLE WASHER. REF USC 01044A

- The sole cleaning is done by the action of the horizontal turning brush and the mixing of water and detergent.
- Dismantling without tools for easy cleaning of the brushes and the sump.
- Separate wet and electrical compartments.
- Supplied with detergent injector for the disinfection product.

DIMENSIONS

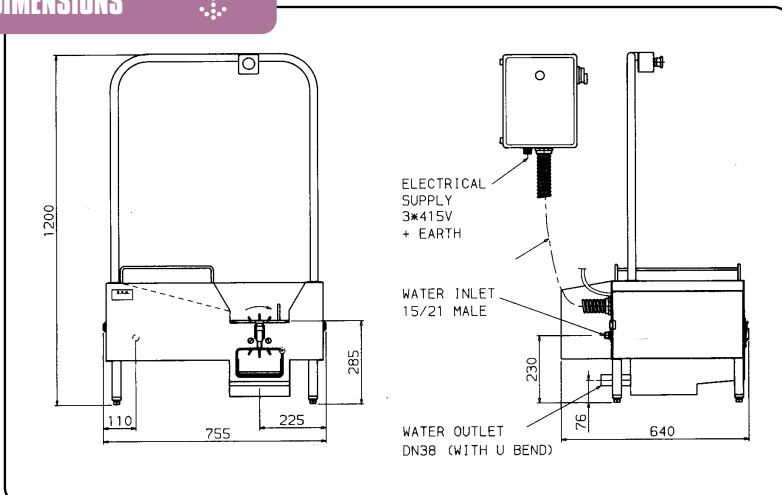

TECHNICAL SPECIFICATIONS

- 304 stainless steel construction.
- Matt finish.
- 1 horizontal brush for cleaning the sole and the clog's extremity.
- Detergent injector - regulation : between 1 and 7.5%.
- Base size : 755 x 640mm.
- Water supply:
Advised pressure : 3 bars.
Maximum temperature : 50°C
Water flow rate : 4l/min
- Electric supply
3 x 415V with earth-power : 0.18kw - 50Hz
Connection to electrical box.

HYGIENE GATE/SOLE WASHER



The hygiene gate/sole washer is composed of 4 stations:

- Station 1: Liquid soap dispenser
- Station 2: Wash-hand basin with optical cell equipped with a paper distributor, a waste bag holder and a sole-washer with two turning brushes.
- Station 3: Disinfectant dispenser..
- Station 4: Swivel 3 arm gate.


Operation:

- A person passes by station 1, then 2, then 3. Once the 3 actions are complete, the swivel (station 4) can move.
- A second person can begin the cycle when the first person has finished at station 3.
- Adjustable cycle time: 10 to 15 seconds.



- Cleaning of the soles is by the combined action of the turning brushes and the water-detergent mix.
- Dismantling without tools for easy cleaning of the brushes and the crankcase.
- Supplied with a detergent doser for the disinfection product.

DIMENSIONS

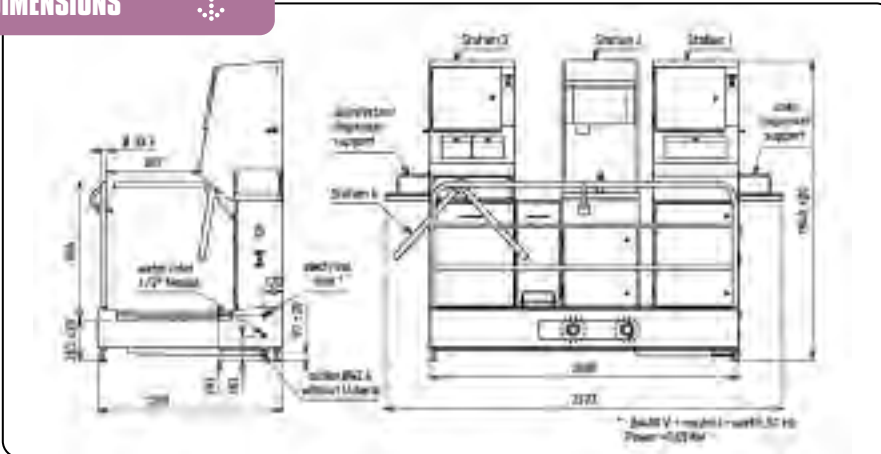

TECHNICAL SPECIFICATIONS

- 304 stainless steel construction.
- Matt finish.
- 2 horizontal brushes for cleaning the sole
- Detergent doser : between 1 and 9.3%.
- Surface area : 2000 x 1200mm.
- Outlet without U-bend.
- Water supply:
 - Advised pressure : 3 bars.
 - Maximum temperature : 50°C
 - Water flow rate : 7l/min
- Electric supply
 - 3 x 400V + neutral + earth consumption : 0.8kw
 - Connection to electrical box.

HYGIENE GATE



- Stainless steel 304 construction.
- Soap or disinfectant applicator (variable dose).
- Turnstile will not operate unless cleanser is dispensed.
- Indicator lights.
- Fully integrated electrics/control.
- High throughputs.
- Complete with stand.



INTEGRATED HYGIENE STATIONS



Contact us for a complete solution to your hygiene access requirements. Boot washers, hygiene turnstile barriers, personnel sinks and soors can all be designed and manufactured to your specific needs and to suit individual customers plant layout.

